

## Retaining Walls - Parkwall® 12" Cap

12" Cap are used for capping of straight walls. They are complete with a notch on the bottom to interlock to Parkwall®, and have a split overhang edge.

A tumbled version is also available for the PARKWALL® CLASSIC wall system, but is special order.

### DIMENSIONS

Length: 600 mm (23.6")  
 Height: 75 mm (2.95")  
 Depth: 300 mm (11.81")

12" Cap



Classic 12" Cap



### COLOURS

Stock colours include: Autumn Range, Blackwood Range, Granite, Laurentian Range, Robinson Range, Sandstone Range, Timmins Range

### ORDER INFORMATION


- Parkwall® 12" Cap units are sold individually.
- For delivery, part cubes will be shrink wrapped.
- Details are provided in the following table.

Sq.Ft. per Bundle	13.5
Stones per Sq.Ft.	2.07
Stones per Bundle	28
Ln.Ft. per Bundle	55.1
Pieces per Ln. Ft.	0.51
Weight per Bundle	1932 lb / 878kg


### ADDITIONAL INSTALLATION INSTRUCTIONS



Place units tight against one another for straight walls.

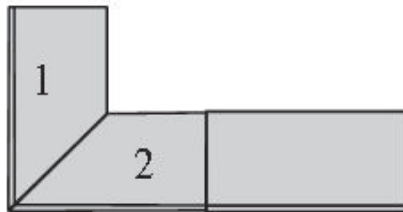

For 90 degree corners, it is recommended that both units 1 and 2 be mitred at 45 degrees so that the split front face is continuous, and the tongue and groove is hidden.

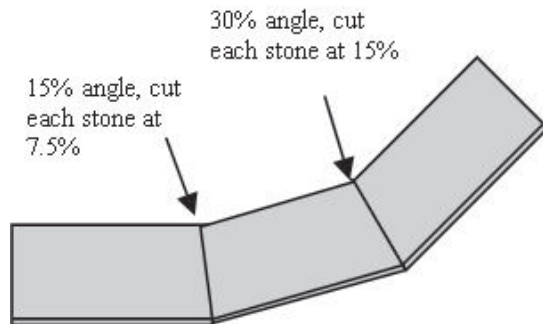

For gradual curves, units can be cut as required. Again, it is recommended that both units be mitred at 1/2 the total angle so that the units sit flush together.